



QUALITY SINCE 1936

**FLORY
ELECTRIC
FIELD ELEVATOR
4840E**

PO BOX 908
4737 TOOMES RD
SALIDA CA 95368
www.goflory.com

209-545-1167





QUALITY SINCE 1936

4840E ELECTRIC FIELD ELEVATOR

FEATURES

- Fully electric high capacity 48 in. wide belt with variable speed, minimizes unload time, which maximizes shuttle efficiency
- Fill up to 9 truckloads (doubles) on a full charge and it can be charged during operation
- Compatible with 120 VAC or 240 VAC power supplies for charging
- Built in 120 VAC 1500W power outlets for tools and other electronics
- Automatic belt start actuated by shuttle trigger
- Powered drive wheel allows for easy movement and positioning
- Optional adjustable output hood centers the load in the trailer without repositioning
- Large unload area and smooth transition from the shuttle prevents loss and damage to the product
- Wireless remotes allow control of elevator functions by the ground crew or directly from the cab of the shuttle
- Trough mounted E-stop, work lights and flashing light tower enhances operator safety
- Suspension axle, integrated brakes and LED lighting improves towing safety
- Cyclone hydraulic tank technology, reduces oil requirement by 25 gallons

OPTIONS

- Battery trailer for charging in field
- Adjustable output hood (standard on 4890)
- Cleated belt • Cover tarp (to prevent bounce-out)

ADVANCED ELECTRICAL CONTROL SYSTEM



CAT BATTERY




18 FT. - 1 IN.
WORKING

10 FT. - 9 IN.
TRANSPORT

39 FT. - 5 IN.

90 IN.

SIMPLE BELT TENSION AND ALIGNMENT SYSTEM AT GROUND LEVEL

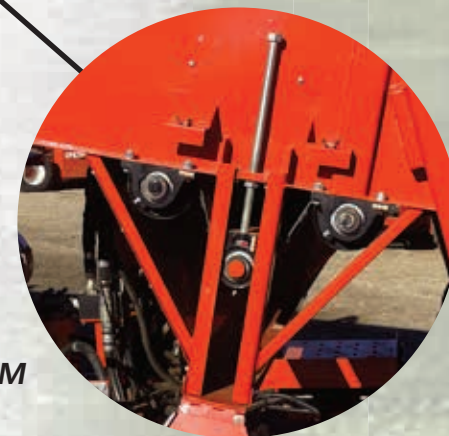


SPECIFICATIONS

BATTERY HORSEPOWER CHARGING	600 VDC 64 KWH 130 HP ELECTRIC MOTOR 3 HRS. @ 240 VAC, 80 AMP (10% - 100%)
HYD. OIL CAPACITY	12 GAL.
BELT WIDTH	48 IN.
TIRES	REAR: 235 - 75R - 17.5, 18 PLY 4840 DRIVE: 18 X 7.00 - 8, 16 PLY



TOUCH-SCREEN CONTROLS



WIRELESS REMOTES