



QUALITY SINCE 1936



QUALITY SINCE 1936

FLORY 4000 SERIES MOWER

PO BOX 908
4737 TOOMES RD
SALIDA CA 95368
www.goflory.com

209-545-1167





4000 SERIES MOWER

FEATURES


- High knife tip speed with smooth profile and large discharge area, produces a clean cut and unobstructed material flow
- Precision balanced knife drum with spherical roller bearings, shaft seals and anti-wrap feature, insures smooth operation and long bearing life
- Quick-change knives and "D" rings can be individually changed within minutes
- Large 8-5/8 in. diameter depth roller, with easy pivoting height adjustment, includes anti-wrap feature and Labyrinth MudBloc seals to protect bearings
- Robust design resists wear and maximizes strength using STRENX and AR400 materials
- Heavy-duty gearbox with hardened forged steel gears and tapered roller bearings
- Durable belt drive with simple low maintenance tension mechanism and indicator
- Fully shielded drive system with easy access grease points to enhance safety
- Low-profile design maximizes clearance and reduces drive-shaft angle
- Replaceable skids and slotted case for easy drum and roller removal
- Compatible with category 2 quick-hitch

OPTIONS

- Standard Scoop Knives with optional Industrial Knives

SPECIFICATIONS

PTO SPEED	540 RPM
MAX RATED PTO HP.	100 HP.
CUTTING HEIGHT RANGE	0 - 5 IN.
DEPTH ROLLER DIAMETER	8-5/8 IN.
ROTOR SPEED	2,160 RPM
KNIFE TIP SPEED	12,900 FT./MIN. APPROX. 150 MPH
WEIGHT	SEE TABLE

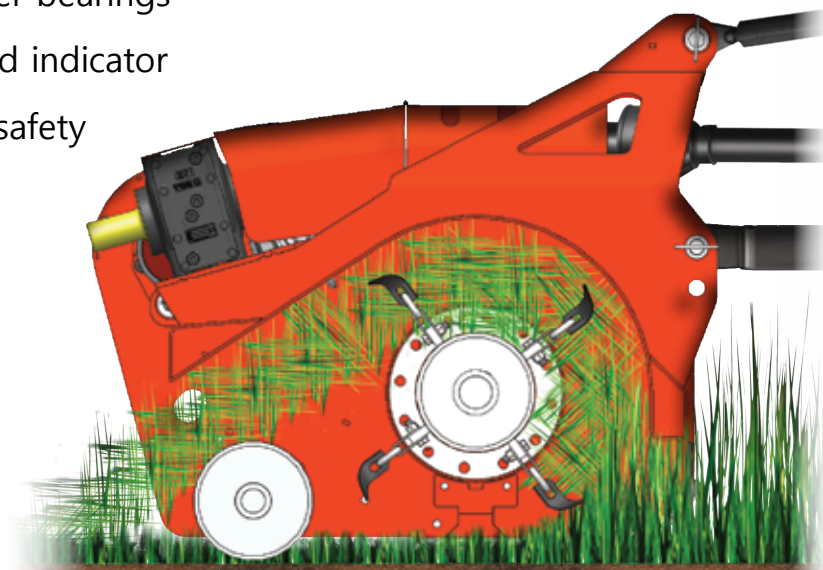

AVAILABLE SIZES

MODEL	CUTTING WIDTH	OVERALL WIDTH	WEIGHT	POWER REQUIRED
4009	9 FT.	9 FT. - 11 IN.	2,255 LBS.	54 HP.
4010	10 FT.	10 FT. - 11 IN.	2,330 LBS.	60 HP.
4011	11 FT.	11 FT. - 11 IN.	2,405 LBS.	66 HP.
4012	12 FT.	12 FT. - 11 IN.	2,480 LBS.	72 HP.
4013	13 FT.	13 FT. - 11 IN.	2,555 LBS.	78 HP.
4014	14 FT.	14 FT. - 11 IN.	2,630 LBS.	84 HP.
4015	15 FT.	15 FT. - 11 IN.	2,705 LBS.	90 HP.